Print on Plain White Paper (Part No. 122919)

Installation Instructions

500 lb. (226.8 kg) Actuator Kit# 002-0564-XX

Installation

1. Prior to mounting the actuator, adjust clevis (1) so that Distance A is equal to that of the actuator being removed. Adjust Distance A by screwing the clevis in to shorten Distance A or unscrewing clevis to lengthen Distance A.

2. When the adjustment is complete, lock the clevis (1) in place by tightening down the two set-screws (2).

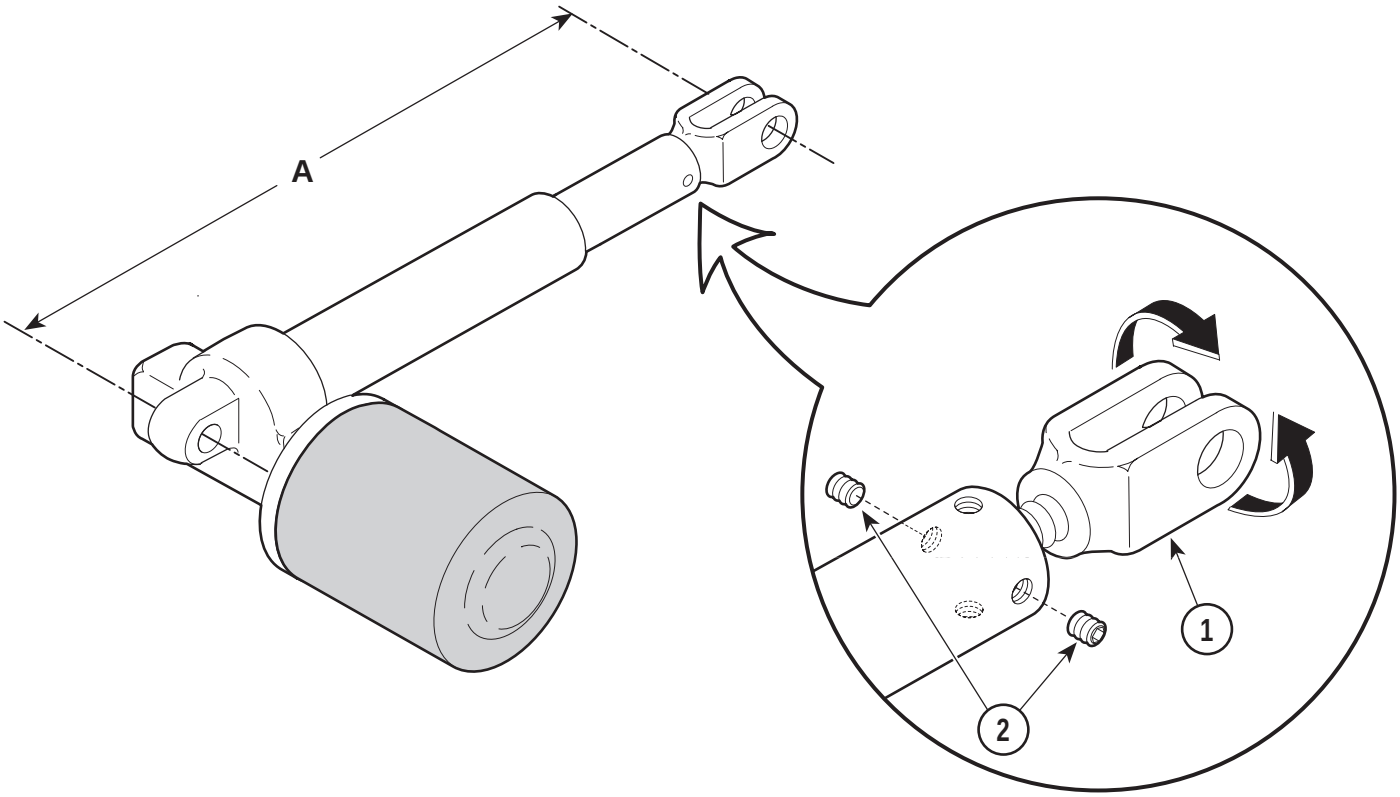

MA392100

FIGURE 1. ACTUATOR INSTALLATION

MIDMARK®

Midmark Corporation, Versailles, Ohio 45380 U.S.A.
937-526-3662 TELEX 288007 FAX 937-526-5542

© Midmark Corporation - 1997

003-0880-00 Rev. A1 (7/97)